

Teslux Round panel TDV




LED

120°

3W
30W

Technické
informácie

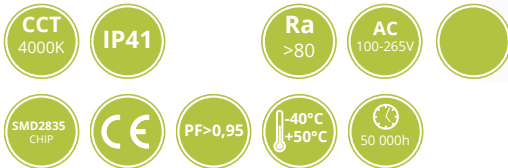


Typ	Výkon	Farba svetla	Svetelný tok	Rozmery	Montážny otvor
TSLX-RP-85-3	3 W	3000 K, 4000 K, 6000 K	240 lm	85 x 19 mm	75 mm
TSLX-RP-120-6	6 W	3000 K, 4000 K, 6000 K	480 lm	120 x 22 mm	105 mm
TSLX-RP-170-12	12 W	3000 K, 4000 K, 6000 K	960 lm	170 x 22 mm	155 mm
TSLX-RP-225-18	18 W	3000 K, 4000 K, 6000 K	1440 lm	225 x 22 mm	210 mm
TSLX-RP-300-30	30 W	3000 K, 4000 K, 6000 K	1920 lm	299 x 22 mm	285 mm

Parametre svietidla

Stupeň krytia:	IP41
Typ LED diód:	SMD 2835
Napájací zdroj:	
Vyžarovací uhol:	120°
Farba svetla:	3000 K, 4000 K, 6000 K
Svetelný tok:	80 lm/W
Index podania farieb:	Ra>80
Napájací zdroj:	AC 200 - 240 V
Účinník:	>0,90
Prevádzková teplota:	od -40°C do +50°C
Stmievateľnosť:	-

Životnosť:	50 000 hodín
Záruka:	36 mesiacov

Materiál:	Hliníkové telo, PMMA
------------------	----------------------

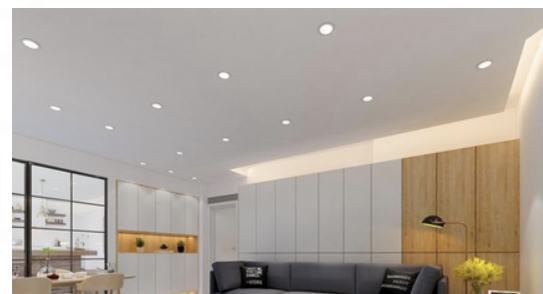

TESLUX, s.r.o.

Bardoňovo 76, 941 49 Bardoňovo
 +421 911 354 285, kurak@teslux.sk